




Known Good Die

10Gbps Long Wavelength InGaAs PIN PD

P/N: DO297_45um_E1_1x4, 1x8, 1x12

PRELIMINARY DATASHEET

Introduction

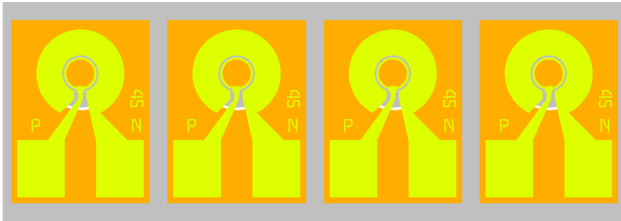

This high-performance product is a front side illuminated InGaAs PIN photodiode array chip that features a large 45 μ m detection window, with the 250 μ m die-to-die pitch. This product has low capacitance, high responsivity, low dark current and excellent reliability, designed for long wavelength optical receiver applications with data rate up to 10Gbps at wavelength from 1200nm to 1600nm with single mode fiber. 1x4, 1x8 and 1x12 array are all provided.

Key Features

- 45 μ m optical detection window for better optical alignment
- Front-sided contact pads for flexible wire bonding
- Data rate up to 10Gbps/channel
- Excellent low dark current and capacitance
- -40C to 85C operation range
- Customization for 1x4, 1x8 and 1x12 array configuration
- Highly robust and low-cost 4" IC wafer fab with fast cycle-time
- Deliverable in GCS Known Good Die™ with 100% testing and inspection
- RoHS compliant

Applications

- 40G SFP+ LR4

SPECIFICATIONS (T=25C°)

	Conditions	Min.	Typical	Max.	Unit	Notes
Bandwidth	-5V	8	10	-	GHz	
Wavelength range		910	1310/1550	1650	nm	
Capacitance	-5 V, 1 MHz		0.11	0.13	pF	
Responsivity	@1310 nm	0.85	0.90	-	A/W	
Dark current	-5V	-	1	5	nA	

ABSOLUTE MAXIMUM RATING

Parameter	Rating
Operating Temperature	-40C to 85C
Storage Temperature	-55C to 125C
Soldering Temperature	260C / 10 sec

Global Communication Semiconductors, LLC

23155 Kashiwa Court, Torrance, CA 90505

Tel: (310) 530-7274 Fax: (310) 517-8200 e-mail: info@gcsincorp.com


www.gcsincorp.com

COPYRIGHT GLOBAL COMMUNICATION SEMICONDUCTORS LLC. ALL RIGHTS RESERVED.



DIMENSIONS

	Conditions	Min.	Typical	Max.	Unit	Notes
Detection window			45		μm	
Bonding pad size			75x90		μm ²	Ground pads
Metal height of bond pad		1.4	1.6	-	μm	Au metal
Die height		110	120	130	μm	
Die width		340	350	360	μm	
Die length			1		mm	For 1x4 Array
			2		mm	For 1x8 Array
			3		mm	For 1x12 Array
Die pitch			250		Um	

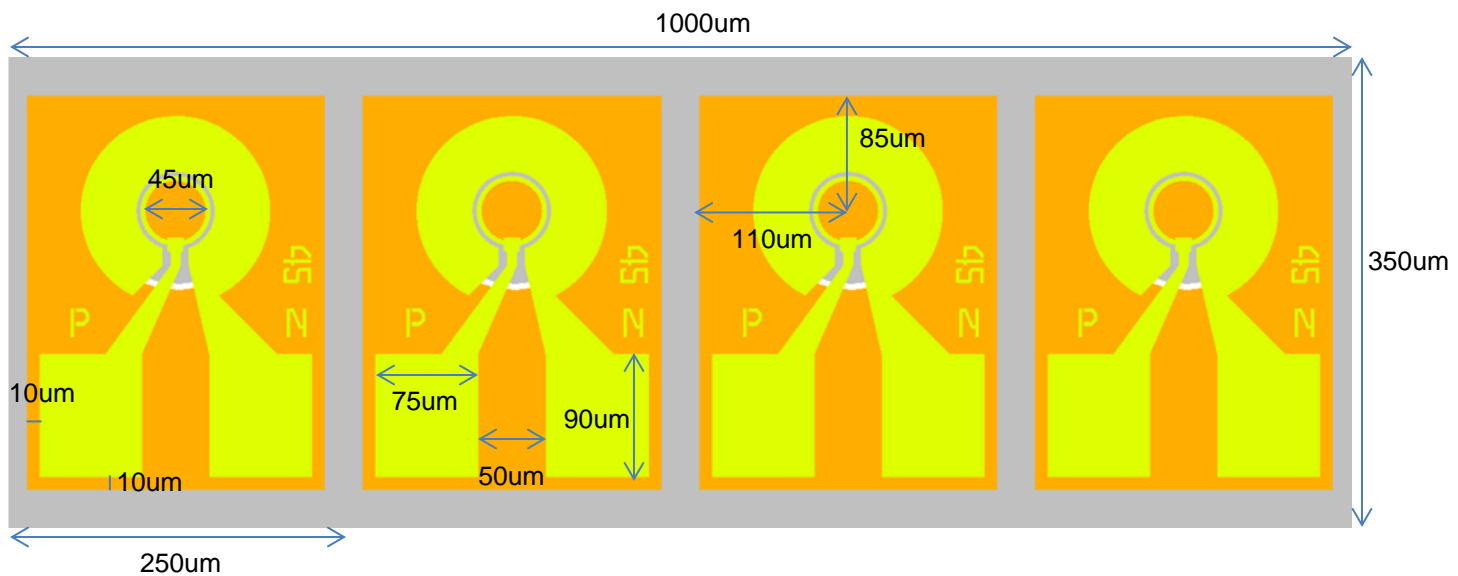

P/N: DO297_45um_E1_1x4

Attention: InP brittle material and electrostatic sensitive device. Observe precaution for handling.

About GCS:

GCS has a long history manufacturing and shipping both GaAs and InGaAs based photo diodes since 2000. Our state of art manufacturing facility is located in Torrance, California, and has about 10,000 square feet of fab space with a capability of about 1200 4-inch wafers per month and expandable to 2000 wafers per month. GCS as a world-class semiconductor device manufacturer has been delivering a total of over 30 million photo diodes with various data rates and applications used for optical communications, which have been deployed in field by top tier optical transceiver companies worldwide. ■

Global Communication Semiconductors, LLC

23155 Kashiwa Court, Torrance, CA 90505

Tel: (310) 530-7274 Fax: (310) 517-8200 e-mail: info@gcsincorp.com

www.gcsincorp.com

COPYRIGHT GLOBAL COMMUNICATION SEMICONDUCTORS LLC. ALL RIGHTS RESERVED.