

GCS InGaAs Monitor PIN PD

P/N: Do064_200um_P2



Known Good Die

DATASHEET



Introduction

This product is a front side illuminated InGaAs monitor PIN photodiode chip that features a planar structure with anode on front side and cathode on backside. This product has a large 200 μ m detection window, and is designed primary to be integrated with a FP or DFB laser in a hermetic TO package, for monitoring the optical power output emitted from the back facet of the edge emitting laser, with excellent responsivity in the wavelength region from 980nm to 1620nm.

Key Features

- Planar structure on n+ InP substrate with top anode contact
- 200 μ m optical detection window optimized for monitoring FP or DFB lasers
- Low operating bias voltage
- -40C to 85C operation range
- Deliverable in GCS Known Good Die™ with 100% testing and inspection
- RoHS compliant

Applications

- Back facet laser power monitoring

SPECIFICATIONS (T=25C°)

	Conditions	Min.	Typical	Max.	Unit	Notes
Responsivity ₁	1310nm	0.8	0.9	-	A/W	
Responsivity ₂	1550nm	0.9	0.95	-	A/W	
Capacitance	-5 V	-	3	4	pF	
Forward Voltage	1mA	-	0.54	0.57	V	
Breakdown	1 μ A	20	-	-	V	
Dark current	-5V	-	0.3	1	nA	
Bandwidth		-	0.5	-	GHz	

Absolute Maximum Rating


Parameter	Rating
Reverse Voltage	-20V
Reverse Current	-10mA
Forward Current	10mA
Optical Power Input	10mW
Operating Temperature	-40C to 85C
Storage Temperature	-40C to 125C
Soldering Temperature	320C / 5 sec



IMPORTANT NOTICE: ALL SPECIFICATIONS, TECHNICAL DATA AND OTHER INFORMATION CONTAINED IN THIS DOCUMENT, AND ALL STATEMENTS ABOUT THE PRODUCT(S) IDENTIFIED IN THIS DOCUMENT, ARE PRELIMINARY IN NATURE AND ARE PROVIDED "AS IS," WITHOUT WARRANTY OR ASSURANCE OF ANY KIND. GCS MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, REGARDING THE PRODUCT(S) OR THEIR SPECIFICATIONS. ALL INFORMATION IS SUBJECT TO CHANGE. PLEASE CONTACT GCS FOR MORE INFORMATION. GCS KNOWN GOOD DIE AND GCS LOGO ARE TRADEMARKS OF GLOBAL COMMUNICATION SEMICONDUCTORS LLC. OTHER TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. COPYRIGHT GLOBAL COMMUNICATION SEMICONDUCTORS LLC. ALL RIGHTS RESERVED.

Dimensions

	Conditions	Min.	Typical	Max.	Unit	Notes
Detection Window			200		μm	
Bonding pad diameter			78		μm	for p-pad
Metal height of bond pads			1.6	-	μm	Au metal
Die height		140	150	160	μm	
Die width		370	380	390	μm	
Die length		370	380	390	μm	

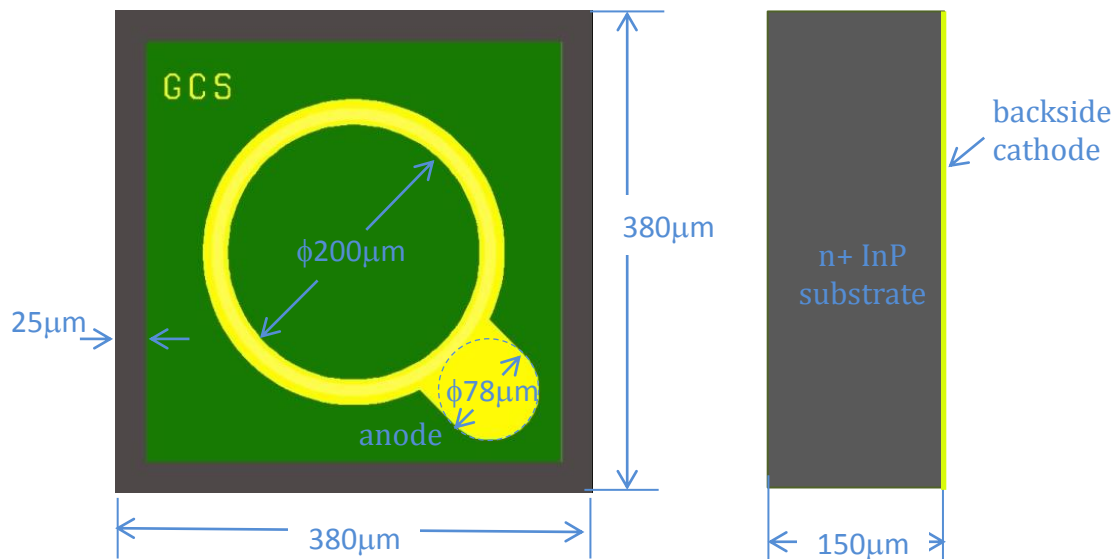

P/N: Do064_200um_P2

Attention: InP brittle material and electrostatic sensitive device, observe precaution for handling.

Contact Information

Global Communication Semiconductors, LLC. 23155 Kashiwa Court, Torrance, CA 90505, USA

- Simon Yu: Tel (310) 530-7274 Ext. 138 Cell (650) 892-8676 Email: syu@gcsincorp.com
- Michael Cheng: Tel (310) 530-7274 Ext. 220 Cell (408) 717-1388 Email: mcheng@gcsincorp.com

About GCS: GCS has a long history manufacturing and shipping both GaAs and InGaAs based photo diodes since 2000. Our state of art manufacturing facility is located in Torrance, California, and has about 10,000 square feet of fab space with a capability of about 1200 4-inch wafers per month and expandable to 2000 wafers per month. GCS as a world-class semiconductor device manufacturer has been delivering a total of over 30 million photo diodes with various date rates and applications used for optical communications, which have been deployed in field by top tier optical transceiver companies worldwide.



IMPORTANT NOTICE: ALL SPECIFICATIONS, TECHNICAL DATA AND OTHER INFORMATION CONTAINED IN THIS DOCUMENT, AND ALL STATEMENTS ABOUT THE PRODUCT(S) IDENTIFIED IN THIS DOCUMENT, ARE PRELIMINARY IN NATURE AND ARE PROVIDED "AS IS," WITHOUT WARRANTY OR ASSURANCE OF ANY KIND. GCS MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, REGARDING THE PRODUCT(S) OR THEIR SPECIFICATIONS. ALL INFORMATION IS SUBJECT TO CHANGE. PLEASE CONTACT GCS FOR MORE INFORMATION. GCS KNOWN GOOD DIE AND GCS LOGO ARE TRADEMARKS OF GLOBAL COMMUNICATION SEMICONDUCTORS LLC. OTHER TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. COPYRIGHT GLOBAL COMMUNICATION SEMICONDUCTORS LLC. ALL RIGHTS RESERVED.